



PRS-CSI Call Station Interface



- ▶ Connects a remote call station to the Praesideo network via CAT-5 cable (up to 1 km)
- ▶ Powered by the Praesideo network and/or local power supply
- ▶ Two supervised control inputs
- ▶ Built-in DSP for audio processing functions
- ▶ Complete supervision of the unit
- ▶ IEC 60849 compliant

The PRS-CSI is an interface between a single remote call station, PRS-CSR, or a remote call station kit, PRS-CSRK, and the fiber optical Praesideo network. It uses CAT-5 cable for the connection to the remote call station. The CAT-5 cable, carrying digital audio and control data, can be as long as 1 km. The length of the CAT-5 cable is not a part of the Praesideo optical network length. This considerably increases the overall possible length of the optical network, especially in cases, where the call station is located far from the rest of the system.

The call station interface can get its power from the Praesideo network, and/or from a local power supply. It is fully supervised and complies with IEC 60849.

Functions

The interface can connect a single PRS-CSR remote call station or PRS-CSRK remote call station kit to a Praesideo system with up to 1 km of CAT-5 cable.

The interface is fully digital, supporting high-quality sound with a built-in DSP for audio processing of the remote call station. It supports complete supervision of itself, the call station, and the connection, as well as of two control inputs. It supports the fail safe mode of remote call stations, allowing them to put through emergency calls, even if the network controller fails. The unit is configured via the network controller.

Controls and indicators

- Two LED indicators for power and network status
- Two jumpers (below cover) to separate power supply of call station interface and remote call station


Interconnectors

- Two Praesideo network connectors
- RJ45 connector for CAT-5 connection
- Kycon type (lockable) connector for power and two control inputs

Certifications and Approvals

Region	Certification	
Europe	CE	
	TUEV-SUED	TUV
	GL	GL
Safety	acc. to IEC 60065-98	
Immunity	acc. to EN 55103-2	
Emissions	acc. to EN 55103-1 / FCC-47 part 15B	
EVAC (TÜV certified)	acc. to IEC 60849	

Installation/Configuration Notes

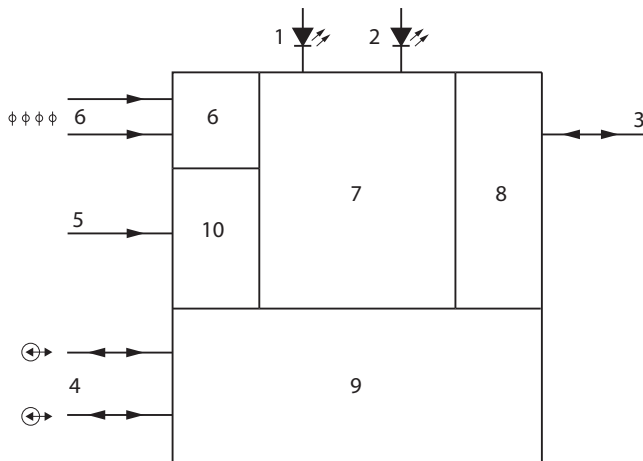

- 1 Fault LED
- 2 Power LED
- 3 Cat.5
- 4 POF
- 5 External (back-up) power 18-56 V
- 6 Control inputs
- 7 Network processor and DSP
- 8 UTP interface
- 9 Network redundancy switching
- 10 Power supply

Parts Included

Quantity Component

- 1 PRS-CSI Call Station Interface
- 1 Power supply connector

Technical Specifications

Electrical

External power supply	18 to 56 VDC
Power consumption	3.7 W
Control inputs	2 x
Operation	Closing contact (with supervision)

Mechanical

Dimensions (H x W x D)	27 x 243 x 80 mm without bracket (1.1 x 9.6 x 3.1 in) 34 x 243 x 84 mm with bracket (1.3 x 9.6 x 3.3 in)
------------------------	---

Weight	0.7 kg (1.5 lb)
--------	-----------------

Mounting	Bracket (2 screws)
----------	--------------------

Color	Charcoal
-------	----------

Environmental

Operating temperature	-5 °C to +45 °C (+23 °F to +113 °F)
-----------------------	-------------------------------------

Storage temperature	-20 °C to +70 °C (-4 °F to +158 °F)
---------------------	-------------------------------------

Humidity	15% to 90%
----------	------------

Air pressure	600 to 1100 hPa
--------------	-----------------

Ordering Information

PRS-CSI Call Station Interface

PRS-CSI

an interface between a single remote call station, PRS-CSR, or a remote call station kit, PRS-CSRK, and the fiber optical Praesideo network.

Accessories

PRS-CSR Call Station Remote

PRS-CSR

same functionality as the basic call station, LBB 4430/00, but it uses CAT-5 cable for its connection to the Praesideo network

PRS-CSRK Call Station Remote Kit

PRS-CSRK

same functionality as the remote call station, PRS-CSR, but without its housing and other components

Americas:
Bosch Communications Systems
12000 Portland Avenue South
Burnsville, Minnesota 55337, USA
Phone: +1-800-392-3497
Fax: +1-800-955-6831
audiosupport@us.bosch.com
www.boschsecurity.com

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: +31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2600
Fax: +65 6571 2698
apr.securitysystems@bosch.com
www.boschsecurity.com

Represented by